


TU700T

Standby power : 687KVA/550KW

Prime power : 625KVA/500KW

Standard features

- Engine : CUMMINS , VTA28-G5
- Charge alternator : 24V
- Governor : Electronic
- Generator : STAMFORD , HCI544FS
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

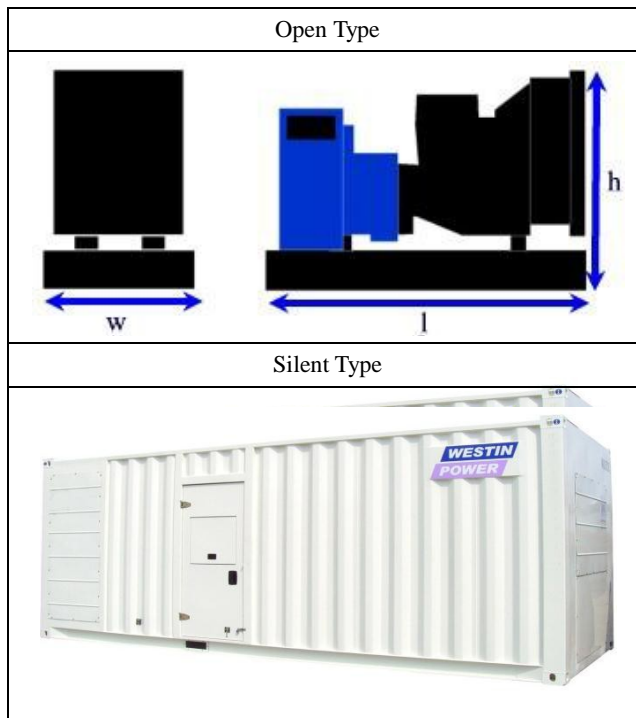

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	3750mm×1720mm×2225mm	5511 Kg
Container Type		

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	992	687/550	625/500

Engine Data

Manufacturer/Model	CUMMINS VTA28-G5 4-cycle
Cylinder /Arrangement	12 / V
Displacement	28 L
Bore and Stroke	140 mm×152 mm
Compression ratio	13.1 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	612KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electronic

Exhaust System

Exhaust gas flow	2048/ L/s
Exhaust temperature	507°C
Max back pressure	76mmHg

Fuel System

Fuel consumption 100% (of the Prime Power)	140 L / h
--	-----------

Oil system

Total oil capacity w/filters	83 L
------------------------------	------

Air intake

Engine air flow	878 L/s
-----------------	---------

Coolant System

Radiator & engine capacity	80 L
Max water temperature	104 °C
Thermostat	82-93 °C

Generator Data

Manufacturer / Type	STAMFORD / HCI544FS
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The **DSE7320** is made by DEEP SEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop. Connect to VOLVO J1939. Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel, Battery voltage, Fuel level.