


TU1250T

Standby power : 1250KVA/1000KW

Prime power : 1135KVA/908KW

Standard features

- Engine : CUMMINS ,QSK38-G2
- Charge alternator : 24V
- Governor : ECM
- Generator : STAMFORD , HCI634K
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

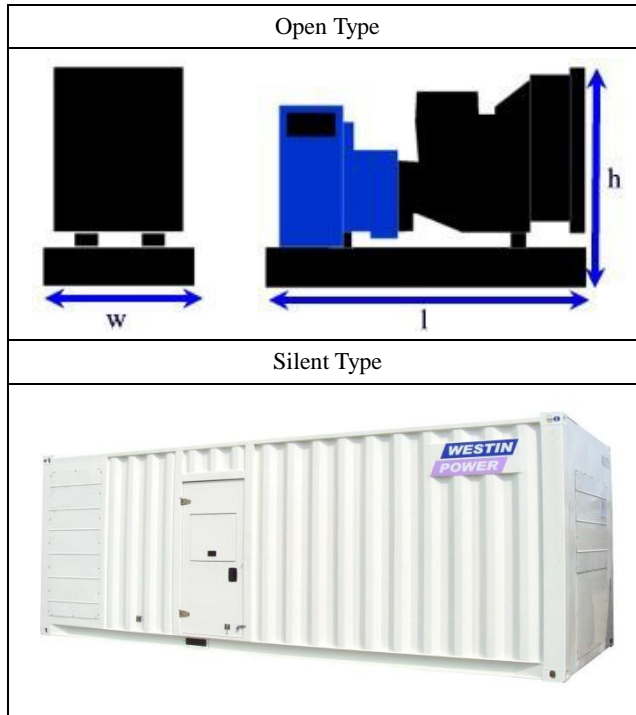

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	4715mm×2140mm×2405mm	7937 Kg
Container Type		

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	1804	1250/1000	1135/908

Engine Data

Manufacturer/Model	CUMMINS QSK38-G2 4-cycle
Cylinder /Arrangement	12 / V
Displacement	37.7 L
Bore and Stroke	159 mm×159 mm
Compression ratio	15.0 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1096KW
Frequency regulation , steady state	≤ 1%
Governor : type	ECM

Exhaust System

Exhaust gas flow	3725 L/s
Exhaust temperature	477°C
Max back pressure	7 KPa

Fuel System

Fuel consumption 100% (of the Prime Power)	242 L / h
--	-----------

Oil system

Total oil capacity w/filters	166.6 L
------------------------------	---------

Air intake

Engine air flow	1553 L/s
-----------------	----------

Coolant System

Radiator & engine capacity	106 L
Max water temperature	104 °C
Thermostat	82-93 °C

Generator Data

Manufacturer / Type	STAMFORD / HCI634K
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The **DSE7320** is made by DEEP SEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop. Connect to VOLVO J1939. Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel, Battery voltage, Fuel level.