

# DRAGON GEAR HD

## Properties

- ▶ High viscosity index.
- ▶ High Extreme-Pressure properties.
- ▶ Excellent antifoam, anticorrosive and antirust properties.
- ▶ Excellent stability in operation.

## Performance


- ▶ API GL-5
- ▶ US MIL-L-2105D
- ▶ SAE : 75W-90, 80W-90, 85W-140

## Uses

- ▶ Gear boxes, axles, transfer boxes.
- ▶ Specially recommended for highly loaded hypoid gears.
- ▶ All types of gears when the MIL-L-2105D specification or API GL-5 is required.

## Characteristics

Property	Unit	75W-90	80W-90	85W-140
Density, 15°C	g/cm <sup>3</sup>	0.8689	0.8894	0.9069
Viscosity, 40°C	mm <sup>2</sup> /s	87.29	133.3	326.9
Viscosity, 100°C	mm <sup>2</sup> /s	14.66	14.14	25.85
Viscosity Index		177	104	98
Flash Point	°C	218	220	238
Pour point	°C	-45	-27.5	-15

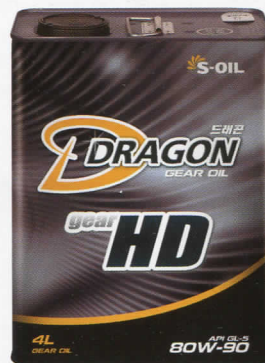

# DRAGON GEAR EP

## Properties

- ▶ High viscosity index.
- ▶ Excellent stability in operation.
- ▶ Excellent antifoam, anticorrosive and antirust properties.
- ▶ High Extreme-Pressure properties.

## Performance

- ▶ API GL-4
- ▶ US MIL-L-2105
- ▶ SAE : 90

## Uses

- ▶ Gear boxes, mild loaded axles, transfer boxes.
- ▶ All types of gears when the MIL-L-2105 specification or API GL-4 is required.

## Characteristics

Property	Unit	SAE 90
Density, 15°C	g/cm <sup>3</sup>	0.8916
Viscosity, 40°C	mm <sup>2</sup> /s	199.2
Viscosity, 100°C	mm <sup>2</sup> /s	17.75
Viscosity Index		97
Flash Point	°C	244
Pour point	°C	-17.5

