

## Revision and History

Part No.: SP03-0605A470M

Product code: TBD

Page: 1/3

Rev.	Date	Revision Description	Checked	Approved
A1	May/23/2019	Initial release.	Louise Liu	Cason Chen

# Spec Sheet

Part No.: SP03-0605A470M

Product code: TBD


Page: 2/3

## Features

- High energy storage and very low resistance
- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to + 125°C  
(including coil's self-temperature rise)
- Moisture sensitivity level:1
- Packaging:1500pcs. Per 13-inch reel
- RoHS&Halogen-free compliance




## Mechanical Dimension(Unit:mm)

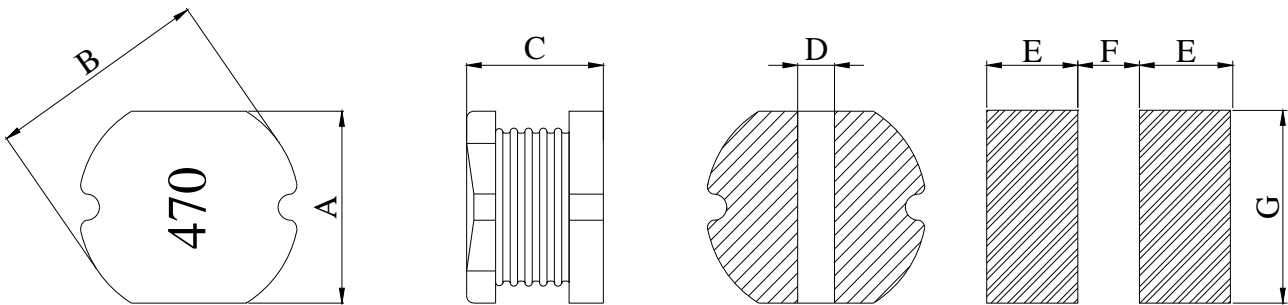

Recommended Layout

A	B	C	D	E	F	G
5.2±0.3	5.8±0.3	4.5±0.3	1.3	2.15	1.7	5.5

## Electrical Schematic



## Part Number Description

SP03 - 0605A 470 M

①      ②      ③      ④

- ① Type
- ② Dimensions
- ③ Inductance value
- ④ Tolerance code

## Electrical Characteristic

Inductance L0(uH)	DCR (Ω)Typ.	DCR (Ω)Max.	Rated Current (A)Typ.	SRF (MHz)Typ.
47±20%	0.26	0.37	0.81	14

- Test frequency and voltage:1MHz,1Vrms.
- All test data referenced to 25°C ambient.
- Rated current: The DC current at which the inductance decreases to 90 % of it's initial value or when Δt=40°C, whichever is lower (Ta=25°C).

# Spec Sheet

Part No.: SP03-0605A470M

Product code: TBD

Page: 3/3

## Material List

No.	Materials	Description	Suppliers	UL No.
1	Core	Ni-Zn Ferrite	Zhongshan CASTLE Technology Co., Ltd. or Equivalent	/
2	Wire	P180 G1 180°C	Elektrisola Hangzhou Co.,Ltd. or Equivalent	E258243
3	Tin	Lead-free Sn99.9	Dongguan Thousand Island Metal Foil Co.,Ltd. or Equivalent	/