




Quick 373C

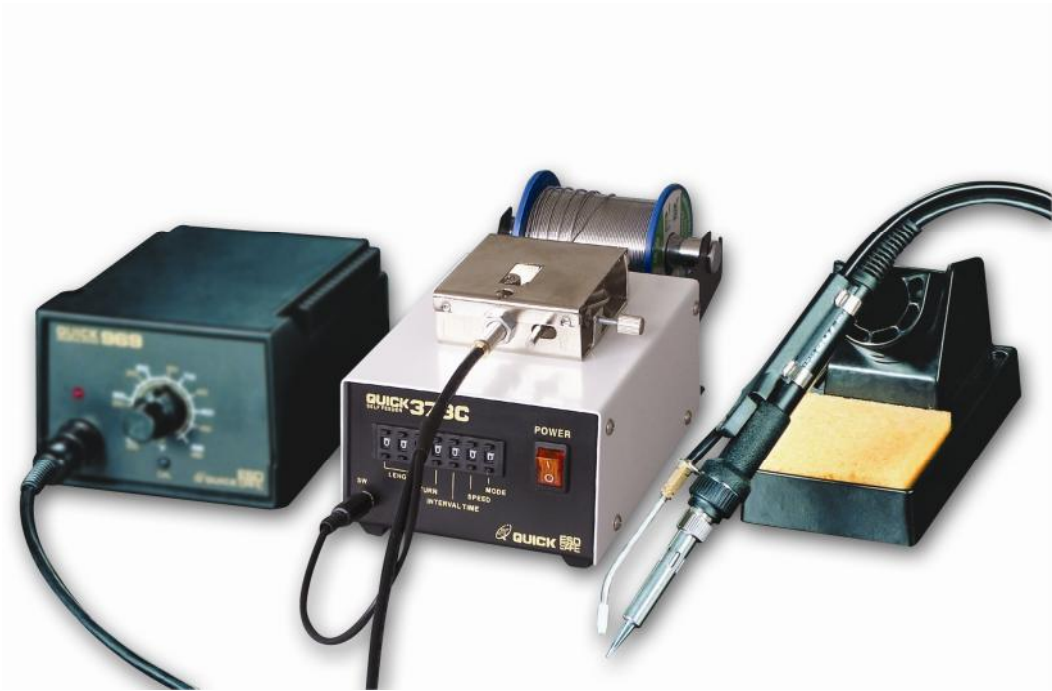

1.	1
1.1.	1
2.	1
3.	1
4.	1
5.	2
6.	2
6.1.	2
6.2.	2
6.3.	2
6.4.	2
6.5.	2
6.6.	3
6.6.1.	3
6.6.3.	3
6.7.	3
6.8.	3
7.	4
8.	4
8.1.	4
8.2.	4

1

1.1

2

3

3.1.

3.1.

	10
	2,7 / 27 /
	0-150
	0-2,7
	0-0,9 (0-25 , 360°/)
	(1-9)/ (0)
	0,5; 0,6; 0,8; 1,0; 1,2; 1,4; 1,6
	1 ()

4

4.1.


4.1.

	1
	1
	1
	1
	1

5

5.1

5.1.

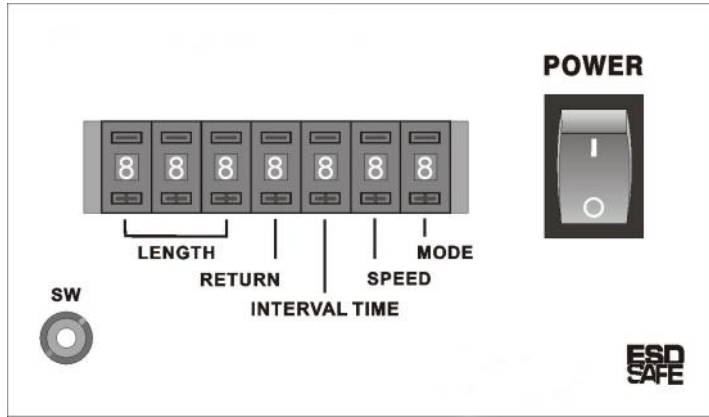

.5.1.

5.1

1	SW		
2	LENGTH		
3	RETURN		
4	INTERVAL TIME		
5	SPEED		
6	MODE		
7	POWER		
8	ESD SAFE		

6

6.1

6.2

•

•

•

«Feeding Length», «Feeding Interval» «Feeding Mode»

6.3

•

•

•

6.4

•

«Feeding mode»,

0		5	5
1	1	6	6
2	2	7	7
3	3	8	8
4	4	9	9

6.5

•

«Returning switch»,

•

- 0,1 360° 0,1 2,88 2, 1, 0,9. 0,2 25 5,6

6.6

6.6.1



.6.6.1.1.

-
-
-
-
-

«SW»

6.6.2

-
-
-
-
-
-
-
-
-
-

6.7

-
-
-
-
-
-
-

«+» 1. «-»

- 2,7 -27 /

(36°/ -360°/).

2,7 /

5,4 / 0, -2,7 / 1,

9, -27 /

2,77 27 /

6.8

001 999

: 003, 150, 001, 3,6, 1,8, 0,3, 0,15
 999, 1798,2, 0,15 150

7

7.1.

7.1.

No.		
47024		
47436-0.6	(0,8)	∅0,6
47436-0.8	(0,8)	∅0,8
47436-1.0	(0,8)	∅1,0
47436-1.2	(0,8)	∅1,2
47436-1.4	(0,8)	∅1,4
47436-1.6	(0,8)	∅1,6
47022-0.6		∅0,6
47022-0.8		∅0,8
47022-1.0		∅1,0
47022-1.2		∅1,2
47022-1.4		∅1,4
47022-1.6		∅1,6
47478-0.6		∅0,6
47478-0.8		∅0,8
47478-1.0		∅1,0
47478-1.2		∅1,2
47478-1.4		∅1,4
47478-1.6		∅1,6
47005-0.6	(0,8)	∅0,6
47005-0.8	(0,8)	∅0,8
47005-1.0	(0,8)	∅1,0
47005-1.2	(0,8)	∅1,2
47005-1.4	(0,8)	∅1,4
47005-1.6	(0,8)	∅1,6

8

8.1

QUICK,

« , , »

- 12

8.2

8.2.1.

			, , , , ,