


RAY FU ENTERPRISE CO., LTD. 瑞滬企業股份有限公司

Description	UN SLOT IND HEX WASHER HEAD U/C SELF DRILLING SCREWS, T-BSD.	Drawing NO.	RF-BI-0544-1
品名	鑽尾螺絲六角華司頭凹切B牙鑽尾	客戶	BLA05001

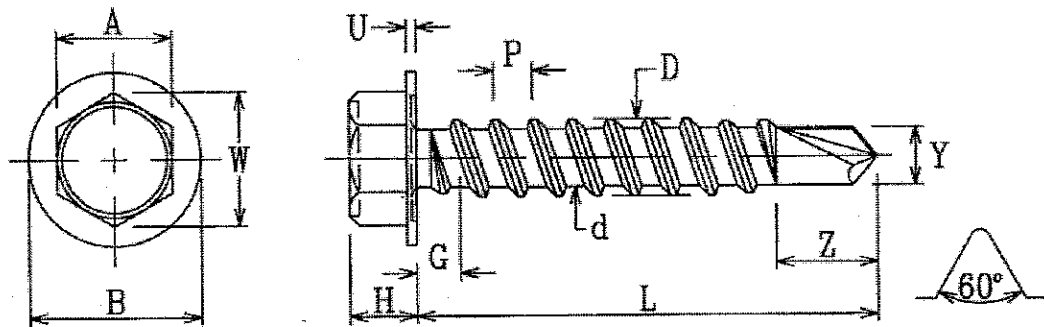

Notes:

1. Materials(材質): 1018 ~ 1022
2. Surface Hardness(表面硬度): Hv 560 Min
3. Core Hardness(心部硬度): Hv 270~425
4. Head according to DIN 6928
5. Thread according to DIN 7504

複製本
 瑞滬企業股份有限公司
 圖面管制章

公稱 Size	A		B		W	H		U	G	D		d	P	Z Ref.		Y		Case Depth 滲碳層	Torsion 扭力 Min
	Min	Max	Min	Max	Min	Min	Max	Min	Max	Min	Max	≡	≡	NO.2	NO.3	Min	Max	mm	Kg-cm
M3.5	5.32	5.50	7.60	8.30	5.96	3.00	3.40	0.6	1.3	3.35	3.53	2.58	1.3	4.05	4.75	2.70	2.80	0.05~0.18	29
M3.9	5.32	5.50	7.60	8.30	5.96	3.00	3.40	0.6	1.4	3.73	3.91	2.85	1.4	4.25	4.75	3.00	3.10	0.10~0.23	35
M4.2	6.78	7.00	8.20	8.80	7.59	3.60	4.10	0.8	1.4	4.04	4.22	3.03	1.4	5.05	5.75	3.35	3.60	0.10~0.23	46
M4.8	7.78	8.00	9.80	10.50	8.71	3.80	4.30	0.9	1.6	4.62	4.80	3.51	1.6	5.75	6.75	3.85	4.10	0.10~0.23	66
M5.5	7.78	8.00	10.00	11.00	8.71	4.80	5.40	1.0	1.8	5.28	5.46	4.08	1.8	6.75	7.75	4.45	4.80	0.10~0.23	102
M6.3	9.78	10.00	12.20	13.20	10.95	5.30	5.90	1.0	1.8	6.03	6.25	4.79	1.8	7.75	8.75	5.45	5.80	0.15~0.28	143

Nominal length: L : Up to 15 mm ± 0.75 L : 26 ~ 50 mm ± 1.25
 16 ~ 18 mm ± 0.90 Over 50 mm ± 1.50
 19 ~ 25 mm ± 1.00

Remark(修改說明):
 Elsa Tsou (Ms.), Sales Specialist
 elsa_tsou@ray-fu.com.tw

核准		審查		繪圖		單位	mm	日期	03/03/05		確認	
Approve		Check		Draft	94.3.3	Unit		Date			Confirm	